

Figure 6 shows a perspective view of a second embodiment of the device 30. The device includes a base 311 with a central opening 317. A cylindrical component 312 is mounted on the base. A rectangular plate 318 is positioned above the cylinder. A U-shaped component 320 is mounted on the plate. A cable 324 is connected to the U-shaped component. A double-headed arrow indicates movement between components.

[illegible]



FIG.32(a)

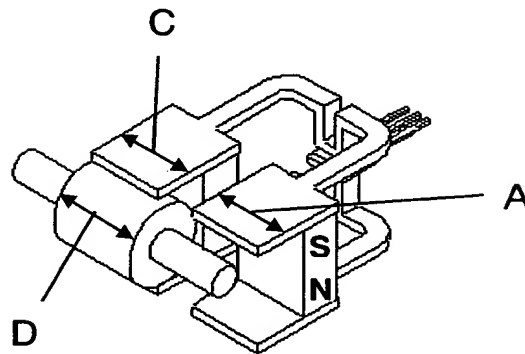


FIG.32(b)

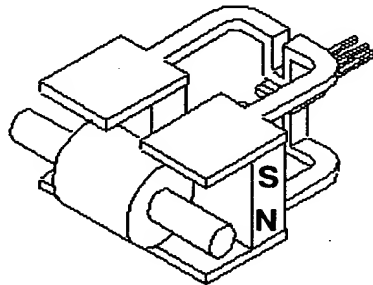


FIG.32(c)






FIG.37(a)

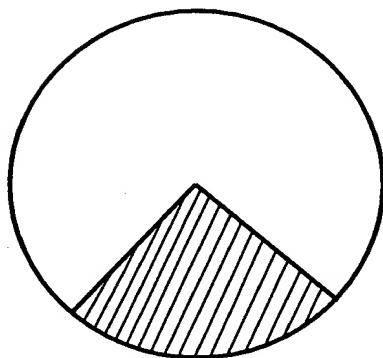


FIG.37(b)

